

ROYPOW TECHNOLOGY CO., LTD. has a policy of improving products continuously. All the information in this catalogue is provided for reference only. We reserve the right to make revisions as well as product alterations and improvements at any time without prior notice. Trademarks are the property of ROYPOW TECHNOLOGY CO., LTD. or their respective owners.

Version: April 12, 2024, RV

ALL-ELECTRIC 48V



RV ENERGY STORAGE SYSTEM

POWER
YOUR HOME
WHERE YOU PARK IT



ROYPOW Technology Co., Ltd.

Tel: +86 (0)752-327 9099

Email: sales@roypowtech.com
service@roypowtech.com
marketing@roypowtech.com

Web: www.roypowtech.com

Add: ROYPOW Industrial Park, No. 16, Dongsheng South Road, Chenjiang Street, Zhongkai High-Tech District, Huizhou City, Guangdong Province, China

ROYPOW (USA) Technology Co., Ltd.

Tel: +1 512 688 5555 (Texas Office)

Email: sales@roypowusa.com

Service Support: +1 626 269 0547
Email: service@roypowusa.com

Web: www.roypowusa.com

Head Office: 5901 Triumph St, Commerce, CA 90040

Texas Office: 2350 Campbell Creek Blvd #100 Richardson, TX 75082, USA

Florida Office: 277 Douglas Avenue, Unit 1004, Altamonte Springs, FL 32714, USA

Indiana Office: 5545 W Raymond St, Ste H Indianapolis, IN 46241, USA

Georgia Office: 1150 Cobb International PI NW Ste E, Kennesaw, GA 30152, USA

ROYPOW Technology UK Limited

Tel: +44 (0) 7918 955 940

Email: sales@roypow.co.uk

Add: Regus Green Park, 200 Brook Dr, Reading RG2 6UB, UK

ROYPOW Battery Technology (Pty) Ltd

Email: sales.za@roypowtech.com

Tel: +27 71 434 3769

Add: 53 Lake Rd, Longmeadow Business Estate, Edenvale, 1609, South Africa



ROYPOW (Europe) Technology B.V.

Email: sales@roypoweurope.com

Tel: +31 702 001 114

Web: www.roypoweurope.com

Add: Seattleweg 1, 3195 ND, Pernis, The Netherlands

ROYPOW Australia Technology Pty Ltd

Email: sales@roypowtech.com.au

Tel: +61 29185 0814

Web: www.roypowtech.com.au

Add: Suite 803a, 18 Orion Road, Lane Cove, NSW, 2066, Australia

ROYPOW Technology GmbH

Tel: +49 (0) 176 2358 8956

Email: sales.de@roypowtech.com

Add: Rosa-Parks-Straße 4, 64295 Darmstadt, Germany

ROYPOW株式会社

Tel: +81 090 7092 6969

Email: info@roypow.co.jp

Web: www.roypow.co.jp


Add: 〒271-0094 千葉県松戸市上矢切299-7

ROYPOW Technology Co., Ltd (Korea)

Tel: 1555-2016

Email: sales.kr@roypowtech.com


Add: 2405, GIDC Gwangmyeong station A Dong, 43 Iljik-ro, Gwangmyeong-si, Gyeonggi-do, Korea

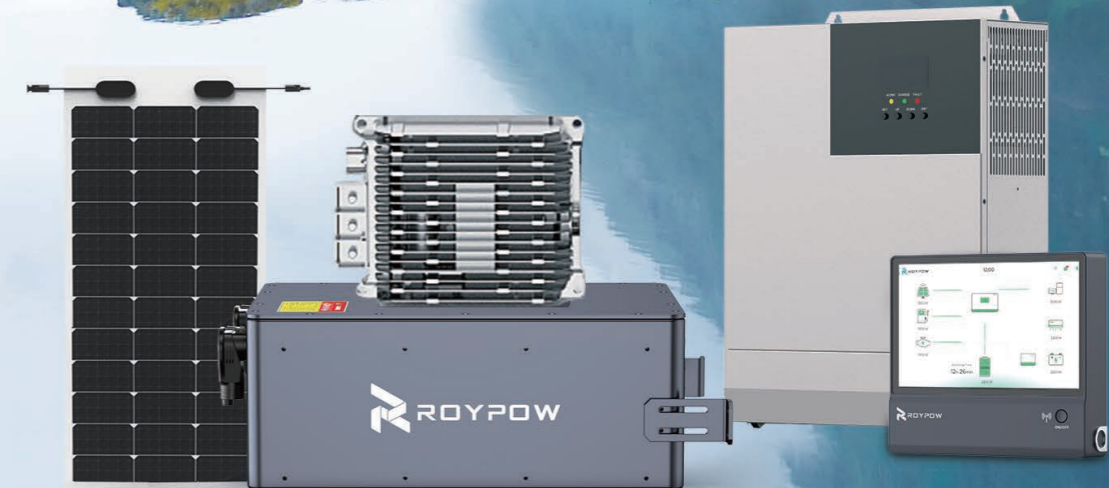

sales@roypowtech.com
www.roypowtech.com



ROYPOW
Your Trusted Partner

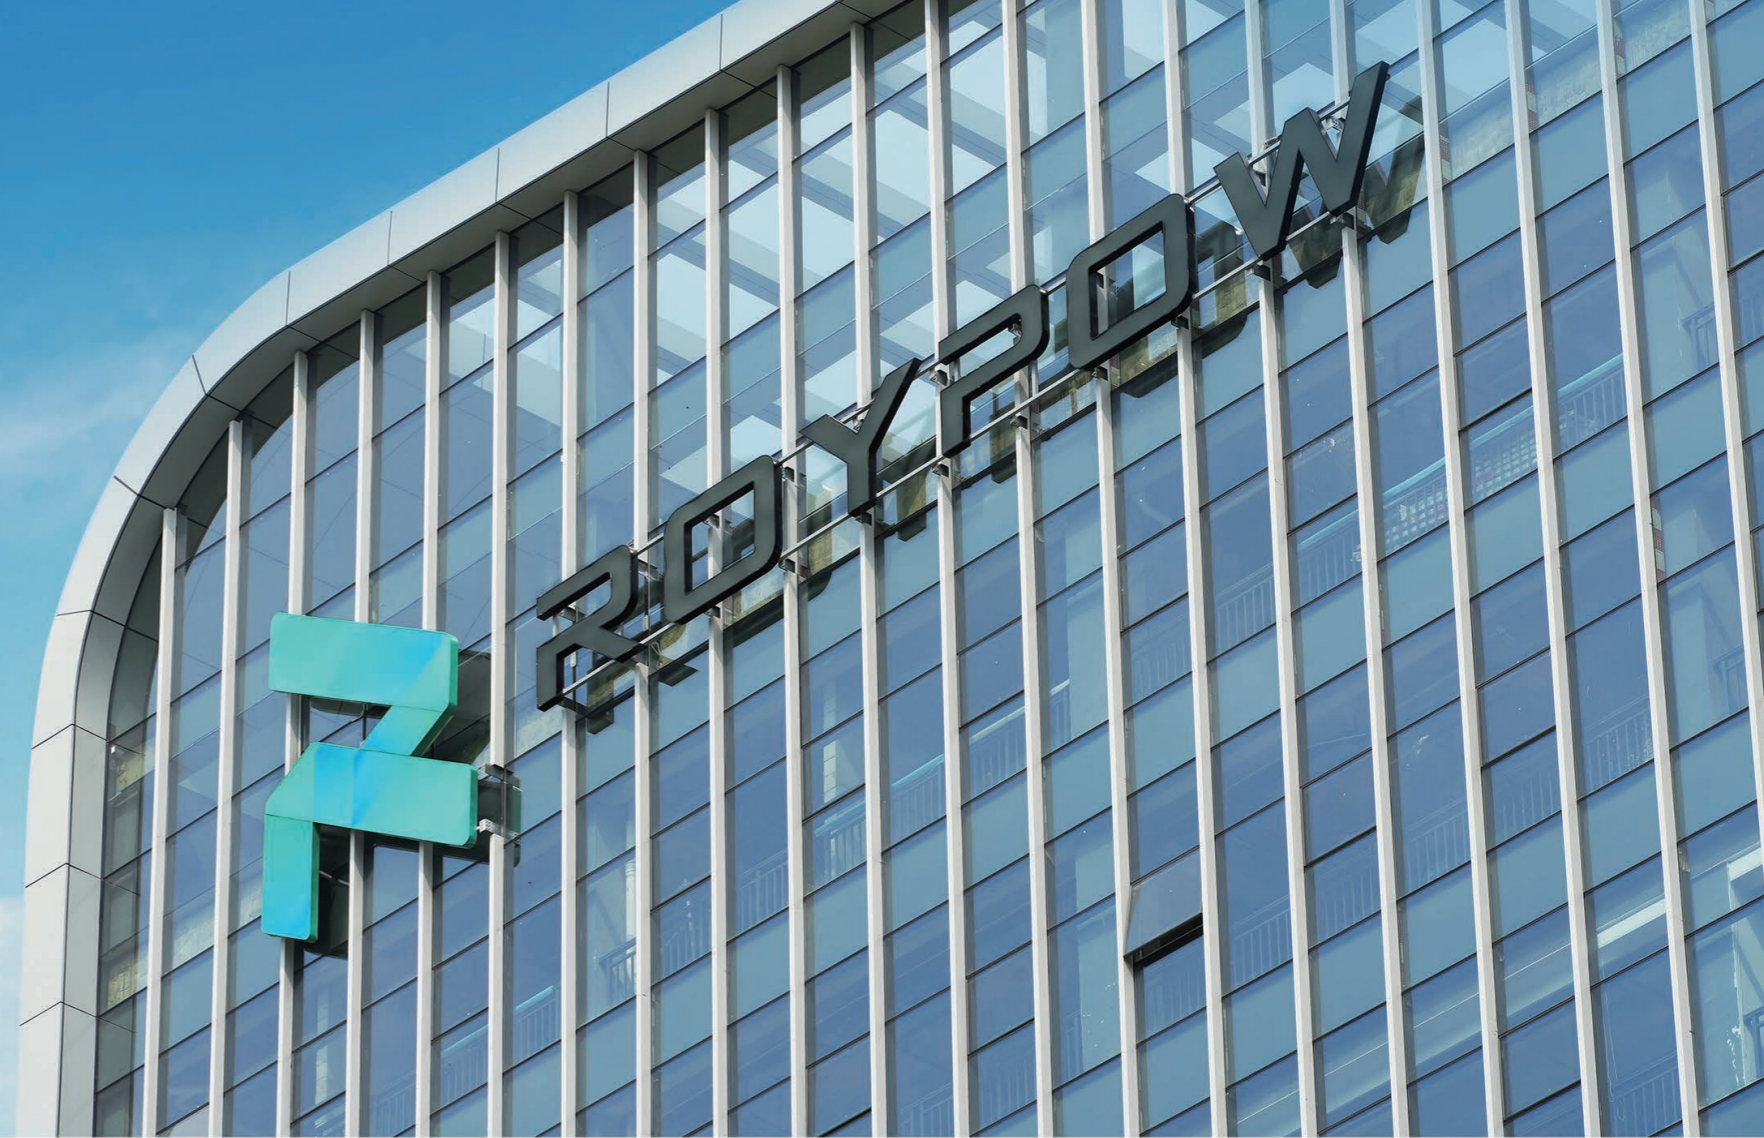

Contents

01 / Introduction of ROYPOW RV ESS

02 / Advantages of ROYPOW RV ESS

03 / Complete Electric Solutions

04 / Products

05 / About Us

OFF-GRID LIVING STARTS TO CHANGE NOW

No need to research campgrounds with electrical hookups.
No need to map routes that end your day at a specific location.
...



Endless Power to Explore. More Freedom to Roam.

No matter where your journey takes you, the ROYPOW RV Energy Storage System (ESS) will meet all of your energy needs, allowing you to roam freely and enjoy your caravan experiences for extended periods. With the comfort you would expect from home, you can relax and travel countless miles more.



Automotive-grade




Long run time



Proven safety



Flexible airflow models

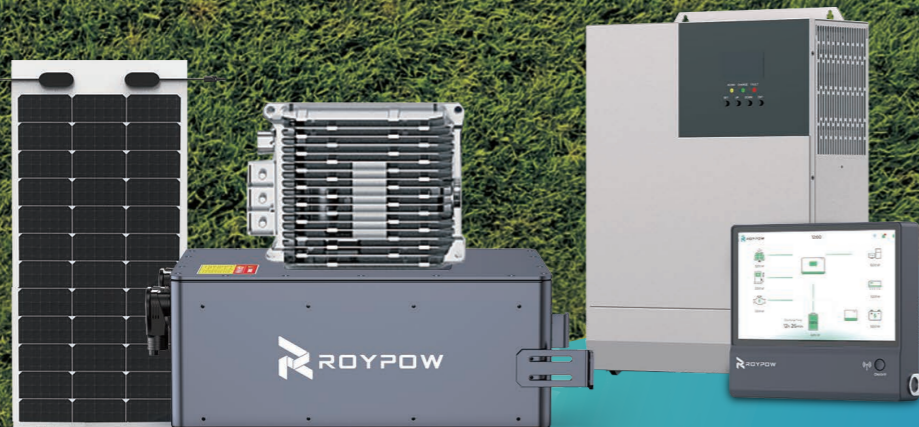

The Shortcomings of Traditional Energy Storage Solutions

High fuel costs

Engine idling

Pollution / noise

High maintenance cost

Safe
LFP (LiFePO4)
chemistry

Virtually
0 maintenance

Up to
10 years
design life

5
charging sources

No Fume / No Noise / No Emission

Over
6,000
life cycles

48 V
system

-4°F - 131°F
operating temperature

The New Standard of RV Energy Storage System

Including 48 V Alternator
ONE-STOP SOLUTION

Upgrade Your RV / Van Power

Enjoy Your Off-grid Adventures for Years to Come!

This system converts an RV into a tiny mobile home by providing RVers sustainable and independent power for a quiet and peaceful off-grid lifestyle. This system empowers RVers with freedom and confidence to extend and enjoy their adventures on their own terms.




ROYPOW RV ESS

Customizable options
with additional solar panels or
all-in-one inverter



Fast charging
shortens the recharge process to
enjoy air conditioner and other
electronics more quickly

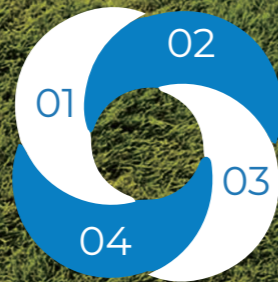

**Consistent & enduring
power supply**
to go off-grid for longer



**Appropriate temperature
control & quiet operation**
for a sound sleep



Multiple Charging Sources

More Versatility
& Flexibility



Alternator

Recharge from the alternator
when the RV is running or idling.



Shore power

Recharge from the shore power
when the RV is parked and plugged
in at a campground.



Solar panel

Recharge from the sun by
connecting to the optional solar
panel.



Charging station

Get recharged when plugging
your RV into a fast charging
station.



Diesel generator

For off-grid emergency backup during
power shortage in rainy seasons,
desert adventures, journeys to isolated
areas, and more.

Power Your Caravan Life, Wherever The Road Takes You.

ROYPOW RV ESS is a fully integrated system that offers the most reliable AC and DC power to run air conditioner and other high power loads in all climate conditions without worrying about power shortage anymore.




Total output
less than
3,500 W

-  Light bulb
-  Mobile phone
-  Mini fridge
-  Electric stove
-  Laptop
-  Pellet grill
-  Coffee maker
-  Microwave

Complete Electric System One-Stop Solution

The electric system captures energy from the RV's alternator or optional solar panel and stores it in independent lithium batteries. This energy is then converted into power for cooling, heating, and electrification for over-the-road sleepers.

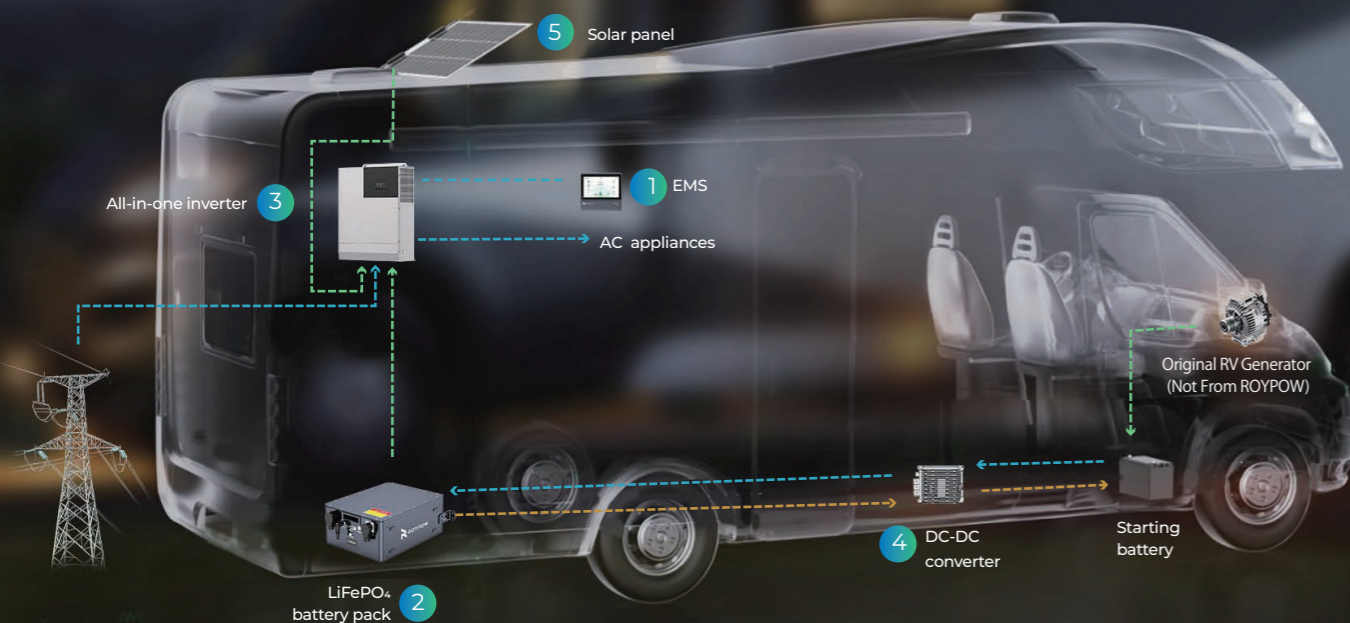

RV Energy Storage Packs Included

1 EMS (XTouch 7)

It collects, manages and coordinates equipment in the region, ensuring the safe, stable, and efficient operation of the system.



- ✓ Real-time Monitoring
- ✓ Coordinated Control
- ✓ Economic Operation Management

2 LiFePO₄ Battery

It meets the power requirements for RVs without the need to idle or run the generator.



Up to **10** Years Design Life
0 Maintenance
>6,000 Life Cycles

3 All-in-one Inverter (Optional)

Combined with an inverter, a battery charger and an MPPT solar charge controller into one complete system to reduce components and simplify installation.




ALL IN ONE

- ✓ Inverter
- +
- ✓ Battery Charger
- +
- ✓ MPPT Solar Charge Controller

4 DC-DC Converter

The bidirectional DC - DC converter is vibration-tested to ensure it can withstand the rigid over-the-road conditions with high performances retained.



- ✓ Automotive-grade
- ✓ Max. efficiency at **95%**

5 Solar Panel (Optional)

Designed to provide long-lasting durability and performance in the extreme over-the-road conditions.



- ✓ Foldable
- ✓ Lightweight

Intelligent Management System

01 Remote Monitoring & Control

- ✓ Monitor and manage RV energy storage system from mobile phones anytime and anywhere
- ✓ Remotely turn on / off the HVAC system in advance for unrivaled comfort and convenience



Wi-Fi Connection Everywhere 02

- ✓ Automatically switch to available network operators globally with built-in wireless data terminal
- ✓ Reliable Wi-Fi hotspots are available to deliver the best internet experience for RVers



XTouch 7 Energy Management System (EMS)

The energy management system (EMS) collects, manages and coordinates equipment in the region, ensuring the safe, stable, and efficient operation of the system. It can realize real-time monitoring, coordinated control, and economic operation management, and support functions such as load tracking, photovoltaic power forecasting, and demand-side management.

XTouch 7 Energy Management System (EMS)

The energy management system (EMS) collects, manages and coordinates equipment in the region, ensuring the safe, stable, and efficient operation of the system. It can realize real-time monitoring, coordinated control, and economic operation management, and support functions such as load tracking, photovoltaic power forecasting, and demand-side management.



Technical Specifications

Model	Xtouch7
Display Size	7.0 Inch
Display Type	IPS LCD Display
Resolution	1024 x 600
Brightness	1000 cd / m2
Colours	24-bit RGB
Touch Screen	Projected Capacitive
Operating Voltage	8-60V, 25W
Current Draw	<4 W operating, <2 W standby
Storage Temp	-20°C to 50°C (-4°F to 122°F)
Operating Temp	-20°C to 50°C (-4°F to 122°F)
Ingress Protection	IP65
Interfaces	CAN、RS485、USB、KL15、KL30
Featured functions	Energy allocation management, Wi-Fi hotspot, Remote control, OTA
Dimensions (H x W x D)	7.17 x 6.61 x 1.4 inch (182 x 168 x 36 mm)
Weight	1 kg

Note: All data are based on ROYPOW standard test procedures. Actual performance may vary according to local conditions

LiFePO₄ Battery - Reliable Power for Your Journey

Travel to the most beautiful places with RoyPow LiFePO₄ batteries that are built tough to withstand the most rugged conditions so you can spend more time enjoying the great outdoors and less time worrying about power.



- Up to **10** Years Design Life
- Zero** Maintenance
- >6,000** Life Cycles
- IP65** Rating

Scalable capacity to fit your power needs

8 In Parallel Maximum

40 kWh In Parallel Maximum

Advantages

<p>Ultra Safe Multiple protections, thermal & chemical stability</p>	<p>Long Runtime Longer service life; consistent high performance</p>	<p>High Reliability Automotive grade lithium ferro-phosphate cells (LiFePO₄ cells)</p>	<p>Maintenance Free No filling of distilled water; no frequent battery replacements</p>
<p>Fast Charging Can be charged much faster than traditional lead-acid batteries</p>	<p>More Durable Engineered to resist vibration & shock</p>	<p>Light Weight Space & weight saving, easy to stack and store</p>	<p>Wide Working Temperature Range Discharge at -4°F - 131°F (-20°C - 55°C)</p>

! Tips: Why Choose LiFePO₄ Batteries For RVs?

Except providing longer life, LiFePO₄ batteries have higher energy density and are more stable and reliable. They are environmentally "green" and lightweight to reduce the overall weight.



Technical Specifications

Model	XBmax 5.1L	XBmax 5.1L-24
Rated voltage (cell 3.2 V)	51.2 V	25.6 V
Rated capacity (@ 0.5C, 77°F/ 25°C)	100 Ah	200 Ah
Maximum voltage (cell 3.65 V)	58.4 V	29.2 V
Minimum voltage (cell 2.5 V)	40 V	20 V
Standard capacity (@ 0.5C, 77°F/ 25°C)	≥ 5.12 kWh (support parallel connection up to 8 pcs)	
Continuous discharge / charge current (@ 77°F/ 25°C, SOC 50%, BOL)	100 A / 50 A	200 A / 100 A
Cooling mode	Natural (passive) cooling	
Working range of SOC	5% - 100%	
Ingress protection rating	IP65	
Life cycle (@ 77°F/ 25°C, 0.5C charge, 1C discharge, DoD 50%)	> 6,000	
Remaining capacity at the end of life (according to warranty period, driving pattern, temp. profile, etc)	EOL 70%	
Operating temperature	Charging / Discharging temperature	-4 °F ~ 131°F (-20°C ~ 55°C)
Storage temperature	Short-term (within one month)	-4 °F ~ 131°F (-20°C ~ 55°C)
	Long-term (within one year)	32 °F ~ 95°F (0°C ~ 35°C)
Dimensions (L x W x H)		20.15 x 14.88 x 8.26 inch (512 x 378 x 210mm)
Weight		99.2 lbs (45 kg)

Note: 1. Only authorized personnel are allowed to operate or make adjustments to the batteries
 2. All data are based on ROYPOW standard test procedures. Actual performance may vary according to local conditions
 3. 6,000 cycles achievable if the battery is not discharged below 50% DOD. 3,500 cycles at 70% DoD

All-in-one Inverter

Featuring higher response speed, reliability and industrial standard, this all-in-one Hybrid inverter integrates an inverter, a battery charger and an MPPT solar charge controller into one complete system, largely simplifying off-grid solar installation and ideal for mobile applications!

Features

Around **30%** MPPT energy efficiency improvement

94% Maximum inverter efficiency

All-in-one Design

- ✓ Seamless switching of uninterrupted power supply to meet electricity demand in versatile scenarios

Power Saving

- ✓ Power saving mode automatically reduces power consumption at zero-load

Instant Viewing of Operation

- ✓ The LCD panel displays data and settings, which can also be viewed using the app and webpage

Multiple Safety Protections

- ✓ Short circuit protection, overload protection, reverse polarity protection, and so on



ALL IN ONE



Inverter



Battery Charger



MPPT Solar Charge Controller


Technical Specifications

Model	R3500S-U	R5000S-E
Battery Input		
Battery Type	Lithium Ferro-Phosphate (LFP)	Sealed, Flood, GEL, LFP, Ternary
Rated Battery Input Voltage	48 V	48 V
Battery Voltage Range	40 Vdc - 60 Vdc ± 0.6 Vdc	40 Vdc - 60 Vdc ± 0.6 Vdc
Hybrid Charging Maximum Charging Current	120 A	80 A
Solar Input		
Maximum PV Input Current	50 A	22 A
Maximum PV Input Power	4,400 W	5,500 W
Maximum PV Charging Current	80 A	80 A
PV Working Voltage Range	60 - 145 Vdc	120 - 500 Vdc
MPPT Voltage Range	60 - 115 Vdc	120 - 450 Vdc
AC Input (Generator/Grid)		
Rated Input Voltage	110 / 120 Vac	220 / 230 Vac
Mains Maximum Charging Current	40 A	60 A
Mains Charging Efficiency	>95%	>95%
Switch Time	10 ms (Typical Value)	10 ms (Typical Value)
AC Output		
Peak Power	3,500 VA	10,000 VA
Rated Output Power	3,500 W (2,900 / 2,050 / 3,200 W)	5,000 W (4,350 / 4,500 / 4,750 / 5,000 W)
Rated Output Voltage	120 Vac (180 / 185 / 110 Vac)	230 Vac (200 / 208 / 220 / 240 Vac)
No-load Loss	Non Energy-saving Mode: ≤ 50 W Energy-saving Mode: ≤ 25 W (Manual Setup)	
General		
Certificate	CE (IEC 62109-1) / CETLC (UL1741 / CSA C22.2 NO.107.1)	
Working Temperature Range	5°F - 131°F (-15°C - 55°C)	14°F ~ 131°F (-10°C ~ 55°C)
Storage Temperature Range	-13°F - 140°F (-25°C - 60°C)	
Humidity Range	5% - 95%	
Weight	23.8 lbs (10.8 kg)	23.2 lbs (10.5 kg)
Dimension	16.8 x 12.7 x 4.9 inch (426 x 322 x 124 mm)	16.8 x 12.7 x 4.9 inch (426 x 322 x 124 mm)

Note: All data are based on ROYPOW standard test procedures. Actual performance may vary according to local conditions

Bidirectional DC-DC Converter

Designed specifically for RV use, the bidirectional DC - DC converter is vibration-tested to ensure it can withstand the rigid road conditions with high performances retained.

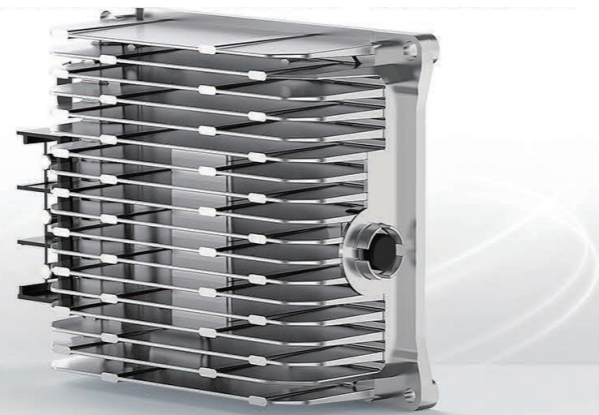

It can achieve

- High efficiency & reduced switching losses
- Rugged design for mobile environments
- Wide operating temperature range -40°F ~ 185°F (-40°C ~ 85°C)


Technical Specifications

Model	XDC2500-12
48 V Voltage range	24 V - 36 / 48 / 54 V - 57 V
12 V Voltage range	8 V - 8.5 / 14 / 15.5 V - 16 V
Max. Rated Power	Buck: 2.5 kW (178 A @14 V), Boost: 2 kW (41 A @48 V) Buck mode: The derating factor is 15.5 V - 16 V , 8.5 V-8 V corresponding to 100% - 0 load Boost mode: The derating factor is 54 V - 57 V, 36 V-24 V corresponding to 100% - 0 load
Over-temperature protection range	248°F (120°C)
CAN communication	CAN communication
Wake-up type	KL15
Precharge time	Once pre-charge instruction is received, the 48 V side busbar capacitor voltage is expanded from 12 V to rated 48 V set by the controller in 150 ms.
Working temperature range	1. At temperature below -40°F (-40°C), the output is turned off. 2. At temperature between 104°F - 140°F (40°C - 60°C), full power output is reached. 3. At temperature between 140°F - 185°F (60°C - 85°C), linear reduced output of 2,500 W - 0 W is provided. 4. At temperature above 185°F (85°C), output is turned off.
Ingress protection rating	IP67
Weight	< 6.6 lbs (3 kg)
Dimension	9.4 x 6.9 x 3.0 inch (238 x 175 x 75 mm)

Note: All data are based on ROYPOW standard test procedures. Actual performance may vary according to local conditions.

Solar Panel

Maximize your savings and enjoy the peace of mind that comes with solar panel's top durability, reliability and efficiency. Ideally suited for RV applications.

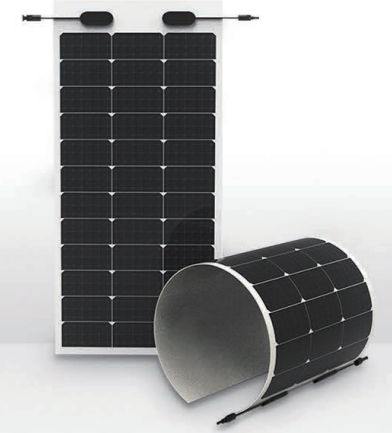

- Flexible & foldable
- Durable & weather-resistant
- Compact & lightweight
- Ultra thin & easy installation
- High conversion efficiency

Technical specifications

Electrical performance		ASP100M36S	
Specification / Model	ASP100NH36S	Maximum power	100 W
Power tolerance	+5 W	Optimum operating voltage	20.12 V
Optimum operating current	5.01 A	Open circuit voltage	24.45 V
Short circuit current	5.31 A	Module efficiency	20.74%
STC: AM=1.5, Irradiance 1.000W / m ² , Module temperature 77°F (25°C).			
Temperature coefficient			
Nominal module operating temperature	109°F ± 36°F (43°C ± 2°C)		
Power temperature coefficient	- 0.36% / °C		
Voltage temperature coefficient	- 0.28% / °C		
Current temperature coefficient	- 0.06% / °C		
Mechanical behavior			
Back material	Backplane (white)		
Module cell	36 (3 x 12) / monocrystalline - PERC / 162.75 mm		
Cable specification (length / sectional area)	90 mm / 4mm ²		
Frame	Frameless	Protection grade of junction box	IP68
Encapsulating materials	EVA / POE	Connector	MC4
Module weight	3.1 lbs (1.4 kg)		
Module actual size (L * W)	39.0 x 19.3 inch (990 x 491 mm)		
Module assembly size (L *W *H)	1,070 mm x 520 mm x 1.7 mm (excluding junction box)		

Note: All data are based on ROYPOW standard test procedures. Actual performance may vary according to local conditions.

ROYPOW, For One-stop New Energy Solutions

ROYPOW TECHNOLOGY is dedicated to the R&D, manufacturing and sales of motive power systems and energy storage systems as one-stop solutions.

With more than 20 years of combined experience in manufacturing renewable energy and battery systems, ROYPOW provides Lithium-ion Batteries covering most daily living and working fields: for Low-Speed Vehicles such as golf carts, personnel carriers; Industrial Batteries for use in Material Handling Equipment such as forklifts, aerial work platforms and floor cleaning machines as well as renewable Energy Storage Systems for residential, commercial, industrial, vehicle-mounted and marine applications.

ROYPOW has established a worldwide network to serve customers with a manufacturing center in China and subsidiaries in the USA, the UK, Germany, the Netherlands, South Africa, Australia, Japan and Korea to date. ROYPOW owns and operates fully automatic production lines, a full range of test equipment and an advanced MES that collectively address all aspects of its manufacturing process, from electronics, software design to module assembly, battery assembly as well as initial and final testing. ROYPOW focuses on the self-development of power electronics technologies, including PCS, BMS, and EMS as the core competence.

As a renewable energy innovator, ROYPOW is committed to the mission of achieving energy sustainability while creating a better life for human beings.



R&D and Manufacturing Highlights

As a result of these investments, ROYPOW is capable of "end-to-end" integrated delivery making our products out-perform the industry norms.

- All-round testing.
- Integrated design.
- Advanced MES system.
- IATF 16949 automotive quality management system certification
- QC system.
- Persistent technology innovation.
- Fully automatic production line.
- ISO12405-2 vibration performance and safety testing of automotive lithium batteries

Global Sales and Service Network System

- Timely Delivery.
- Hassle-free After-sales Service.
- Fast Response Technical Support.

ROYPOW has comprehensively unfolded its overseas market layout to ensure the localization of R&D, manufacturing, marketing and service, becoming one of your most reliable and valuable partners.



Upgrading to New Technology, with Our Turnkey Solutions.

With years of dedication to new energy solutions, we are proud to offer customers professional solutions for:

- ✓ **Low-speed Vehicle Batteries** including golf carts and sightseeing cars;
- ✓ **Industrial Batteries** including forklifts, aerial work platforms and floor cleaning machines;
- ✓ **Vehicle-Mounted Energy Storage Systems & Batteries** including RV and truck energy storage and air conditioning systems, off-grid solar systems for RV, as well as power batteries for electric motorcycles;
- ✓ **Residential Energy Storage Systems** including home storage as well as off-grid energy storage (for forest cabin, island homes without electricity, etc.);
- ✓ **Marine Energy Storage Systems & Batteries** including trolling motors, fish finders, other off-grid energy storage systems for marine, and marine power systems;
- ✓ **Commercial & Industrial Energy Storage Systems** including diesel generator power micro-grid energy storage systems (for tower cranes, air compressors, mixers, crushers, etc);
- ✓ **Chargers** for forklifts, aerial work platforms, floor cleaning machines, golf carts and various marine batteries.

