


EI30-15.5 2.0VA Encapsulated Transformer

FEATURES

- CQC file No.: CQC17001167224
- CE file No: BSTXD190311209301EC/BSTXD190311209301SC
- Vacuum Filling, Encapsulated Design Prevent dust and humidity
- High efficiency, Low Temperature Rise
- Dielectric Strength 4000VAC
- Class B (130° C) insulation material.
- Operating temperature from -40° C to 70° C
- Design according to EN61558-1, EN61000,GB19212-1, GB19212-7
- 100% Production Tested


OUTLINE DIMENSIONS

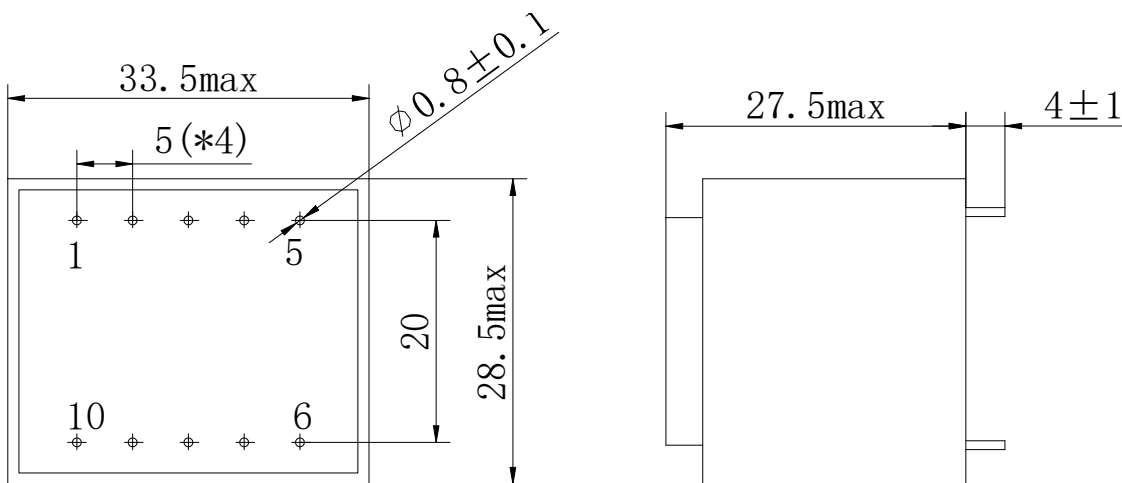

COMMON APPLICATIONS

- Medical equipment
- Industrial equipment
- Industrial control
- Test equipment
- Industrial computer
- Avionics and Telecommunications

SCHEMATIC DIAGRAM

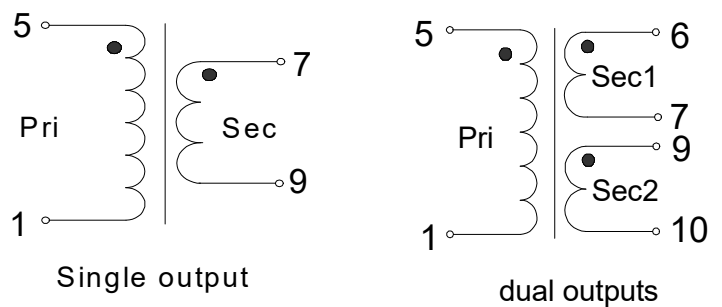

ELECTRONIC SPECIFICATIONS:

PART NO	Primary [V]	Secondary [V]	Current [mA]	Ambient TEMP.(°C)	Weight (g)	Certificate			
						VDE	UL	CQC	CE
XP301-812	115V 50/60Hz	4.5V	444mA	T70 B	98		•		•
XP301-813	115V 50/60Hz	6V	333mA	T70 B	98		•		•
XP301-814	115V 50/60Hz	7.5V	267mA	T70 B	98		•		•
XP301-815	115V 50/60Hz	9V	222mA	T70 B	98		•		•
XP301-816	115V 50/60Hz	12V	167mA	T70 B	98		•		•
XP301-817	115V 50/60Hz	15V	133mA	T70 B	98		•		•
XP301-818	115V 50/60Hz	18V	111mA	T70 B	98		•		•
XP301-819	115V 50/60Hz	24V	83mA	T70 B	98		•		•
XP302-820	115V 50/60Hz	2x4.5V	2x222mA	T70 B	98		•		•
XP302-821	115V 50/60Hz	2x6V	2x167mA	T70 B	98		•		•
XP302-822	115V 50/60Hz	2x7.5V	2x133mA	T70 B	98		•		•
XP302-823	115V 50/60Hz	2x9V	2x111mA	T70 B	98		•		•
XP302-824	115V 50/60Hz	2x12V	2x83mA	T70 B	98		•		•
XP302-825	115V 50/60Hz	2x15V	2x67mA	T70 B	98		•		•
XP302-826	115V 50/60Hz	2x18V	2x56mA	T70 B	98		•		•
XP302-827	115V 50/60Hz	2x24V	2x42mA	T70 B	98		•		•
XP301-712	230V 50/60Hz	4.5V	444mA	T70 B	98		•	•	•
XP301-713	230V 50/60Hz	6V	333mA	T70 B	98		•	•	•
XP301-714	230V 50/60Hz	7.5V	267mA	T70 B	98		•	•	•
XP301-715	230V 50/60Hz	9V	222mA	T70 B	98		•	•	•
XP301-716	230V 50/60Hz	12V	167mA	T70 B	98		•	•	•
XP301-717	230V 50/60Hz	15V	133mA	T70 B	98		•	•	•
XP301-718	230V 50/60Hz	18V	111mA	T70 B	98		•	•	•
XP301-719	230V 50/60Hz	24V	83mA	T70 B	98		•	•	•
XP302-720	230V 50/60Hz	2x4.5V	2x222mA	T70 B	98		•	•	•
XP302-721	230V 50/60Hz	2x6V	2x167mA	T70 B	98		•	•	•
XP302-722	230V 50/60Hz	2x7.5V	2x133mA	T70 B	98		•	•	•
XP302-723	230V 50/60Hz	2x9V	2x111mA	T70 B	98		•	•	•
XP302-724	230V 50/60Hz	2x12V	2x83mA	T70 B	98		•	•	•
XP302-725	230V 50/60Hz	2x15V	2x67mA	T70 B	98		•	•	•
XP302-726	230V 50/60Hz	2x18V	2x56mA	T70 B	98		•	•	•
XP302-727	230V 50/60Hz	2x24V	2x42mA	T70 B	98		•	•	•