


## EI48-20.5 10.0VA Encapsulated Transformer

### FEATURES

- CQC file No.: CQC17001167224
- CE file No: BSTXD190311209301EC/BSTXD190311209301SC
- Vacuum Filling, Encapsulated Design Prevent dust and humidity
- High efficiency, Low Temperature Rise
- Dielectric Strength 4000VAC
- Class B (130° C) insulation material.
- Operating temperature from -40° C to 70° C
- Design according to EN61558-1, EN61000,GB19212-1, GB19212-7
- 100% Production Tested


### OUTLINE DIMENSIONS

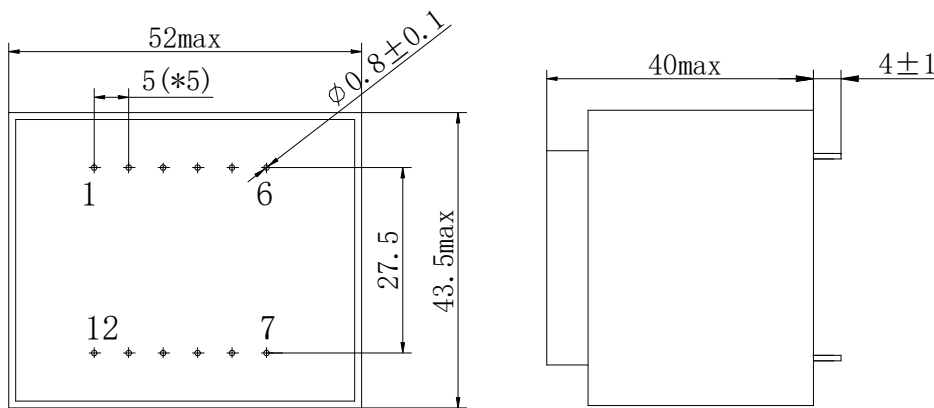

### COMMON APPLICATIONS

- Medical equipment
- Industrial equipment
- Industrial control
- Test equipment
- Industrial computer
- Avionics and Telecommunications

### SCHEMATIC DIAGRAM

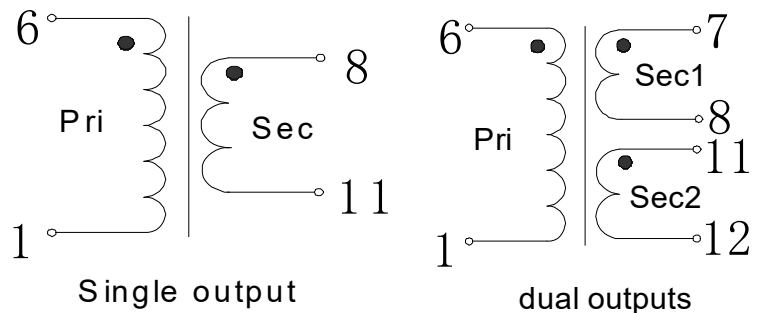

## ELECTRONIC SPECIFICATIONS:

PART NO	Primary [V]	Secondary [V]	Current [mA]	Ambient TEMP.(°C)	Weight (g)	Certificate			
						VDE	UL	CQC	CE
XP481-832	115V 50/60Hz	4.5V	2222mA	T70 B	330		•		•
XP481-833	115V 50/60Hz	6V	1666mA	T70 B	330		•		•
XP481-834	115V 50/60Hz	7.5V	1333mA	T70 B	330		•		•
XP481-835	115V 50/60Hz	9V	1111mA	T70 B	330		•		•
XP481-836	115V 50/60Hz	12V	833mA	T70 B	330		•		•
XP481-837	115V 50/60Hz	15V	666mA	T70 B	330		•		•
XP481-838	115V 50/60Hz	18V	555mA	T70 B	330		•		•
XP481-839	115V 50/60Hz	24V	416mA	T70 B	330		•		•
XP482-840	115V 50/60Hz	2x4.5V	2x1111mA	T70 B	330		•		•
XP482-841	115V 50/60Hz	2x6V	2x833mA	T70 B	330		•		•
XP482-842	115V 50/60Hz	2x7.5V	2x666mA	T70 B	330		•		•
XP482-843	115V 50/60Hz	2x9V	2x555mA	T70 B	330		•		•
XP482-844	115V 50/60Hz	2x12V	2x416mA	T70 B	330		•		•
XP482-845	115V 50/60Hz	2x15V	2x333mA	T70 B	330		•		•
XP482-846	115V 50/60Hz	2x18V	2x277mA	T70 B	330		•		•
XP482-847	115V 50/60Hz	2x24V	2x208mA	T70 B	330		•		•
XP481-932	230V 50/60Hz	4.5V	2222mA	T70 B	330		•	•	•
XP481-933	230V 50/60Hz	6V	1666mA	T70 B	330		•	•	•
XP481-934	230V 50/60Hz	7.5V	1333mA	T70 B	330		•	•	•
XP481-935	230V 50/60Hz	9V	1111mA	T70 B	330		•	•	•
XP481-936	230V 50/60Hz	12V	833mA	T70 B	330		•	•	•
XP481-937	230V 50/60Hz	15V	666mA	T70 B	330		•	•	•
XP481-938	230V 50/60Hz	18V	555mA	T70 B	330		•	•	•
XP481-939	230V 50/60Hz	24V	416mA	T70 B	330		•	•	•
XP482-940	230V 50/60Hz	2x4.5V	2x1111mA	T70 B	330		•	•	•
XP482-941	230V 50/60Hz	2x6V	2x833mA	T70 B	330		•	•	•
XP482-942	230V 50/60Hz	2x7.5V	2x666mA	T70 B	330		•	•	•
XP482-943	230V 50/60Hz	2x9V	2x555mA	T70 B	330		•	•	•
XP482-944	230V 50/60Hz	2x12V	2x416mA	T70 B	330		•	•	•
XP482-945	230V 50/60Hz	2x15V	2x333mA	T70 B	330		•	•	•
XP482-946	230V 50/60Hz	2x18V	2x277mA	T70 B	330		•	•	•
XP482-947	230V 50/60Hz	2x24V	2x208mA	T70 B	330		•	•	•