


EI48-20.5 12.0VA Encapsulated Transformer

FEATURES

- CQC file No.: CQC17001167224
- CE file No: BSTXD190311209301EC/BSTXD190311209301SC
- Vacuum Filling, Encapsulated Design Prevent dust and humidity
- High efficiency, Low Temperature Rise
- Dielectric Strength 4000VAC
- Class B (130° C) insulation material.
- Operating temperature from -40° C to 70° C
- Design according to EN61558-1, EN61000,GB19212-1, GB19212-7
- 100% Production Tested


OUTLINE DIMENSIONS

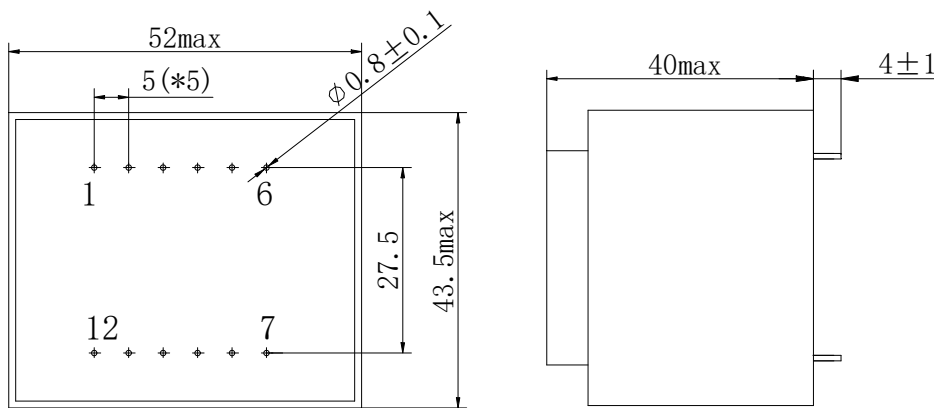

COMMON APPLICATIONS

- Medical equipment
- Industrial equipment
- Industrial control
- Test equipment
- Industrial computer
- Avionics and Telecommunications

SCHEMATIC DIAGRAM

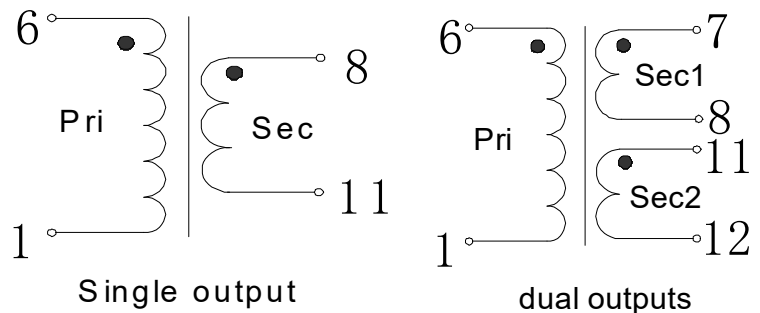

ELECTRONIC SPECIFICATIONS:

PART NO	Primary [V]	Secondary [V]	Current [mA]	Ambient TEMP.(°C)	Weight (g)	Certificate			
						VDE	UL	CQC	CE
XP481-848	115V 50/60Hz	4.5V	2666mA	T40 B	330		•		•
XP481-849	115V 50/60Hz	6V	2000mA	T40 B	330		•		•
XP481-850	115V 50/60Hz	7.5V	1600mA	T40 B	330		•		•
XP481-851	115V 50/60Hz	9V	1333mA	T40 B	330		•		•
XP481-852	115V 50/60Hz	12V	1000mA	T40 B	330		•		•
XP481-853	115V 50/60Hz	15V	800mA	T40 B	330		•		•
XP481-854	115V 50/60Hz	18V	666mA	T40 B	330		•		•
XP481-855	115V 50/60Hz	24V	500mA	T40 B	330		•		•
XP482-856	115V 50/60Hz	2x4.5V	2x1333mA	T40 B	330		•		•
XP482-857	115V 50/60Hz	2x6V	2x1000mA	T40 B	330		•		•
XP482-858	115V 50/60Hz	2x7.5V	2x800mA	T40 B	330		•		•
XP482-859	115V 50/60Hz	2x9V	2x666mA	T40 B	330		•		•
XP482-860	115V 50/60Hz	2x12V	2x500mA	T40 B	330		•		•
XP482-861	115V 50/60Hz	2x15V	2x400mA	T40 B	330		•		•
XP482-862	115V 50/60Hz	2x18V	2x333mA	T40 B	330		•		•
XP482-863	115V 50/60Hz	2x24V	2x250mA	T40 B	330		•		•
XP481-948	230V 50/60Hz	4.5V	2666mA	T40 B	330		•	•	•
XP481-949	230V 50/60Hz	6V	2000mA	T40 B	330		•	•	•
XP481-950	230V 50/60Hz	7.5V	1600mA	T40 B	330		•	•	•
XP481-951	230V 50/60Hz	9V	1333mA	T40 B	330		•	•	•
XP481-952	230V 50/60Hz	12V	1000mA	T40 B	330		•	•	•
XP481-953	230V 50/60Hz	15V	800mA	T40 B	330		•	•	•
XP481-954	230V 50/60Hz	18V	666mA	T40 B	330		•	•	•
XP481-955	230V 50/60Hz	24V	500mA	T40 B	330		•	•	•
XP482-956	230V 50/60Hz	2x4.5V	2x1333mA	T40 B	330		•	•	•
XP482-957	230V 50/60Hz	2x6V	2x1000mA	T40 B	330		•	•	•
XP482-958	230V 50/60Hz	2x7.5V	2x800mA	T40 B	330		•	•	•
XP482-959	230V 50/60Hz	2x9V	2x666mA	T40 B	330		•	•	•
XP482-960	230V 50/60Hz	2x12V	2x500mA	T40 B	330		•	•	•
XP482-961	230V 50/60Hz	2x15V	2x400mA	T40 B	330		•	•	•
XP482-962	230V 50/60Hz	2x18V	2x333mA	T40 B	330		•	•	•
XP482-963	230V 50/60Hz	2x24V	2x250mA	T40 B	330		•	•	•