


EI54-18.8 13.0VA Encapsulated Transformer

FEATURES

- CQC file No.: CQC17001167224
- CE file No: BSTXD190311209301EC/BSTXD190311209301SC
- Vacuum Filling, Encapsulated Design Prevent dust and humidity
- High efficiency, Low Temperature Rise
- Dielectric Strength 4000VAC
- Class B (130° C) insulation material.
- Operating temperature from -40° C to 70° C
- Design according to EN61558-1, EN61000,GB19212-1, GB19212-7
- 100% Production Tested


OUTLINE DIMENSIONS

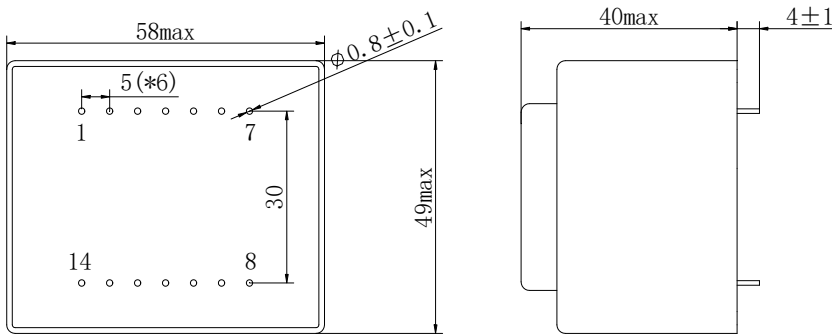

COMMON APPLICATIONS

- Medical equipment
- Industrial equipment
- Industrial control
- Test equipment
- Industrial computer
- Avionics and Telecommunications

SCHEMATIC DIAGRAM

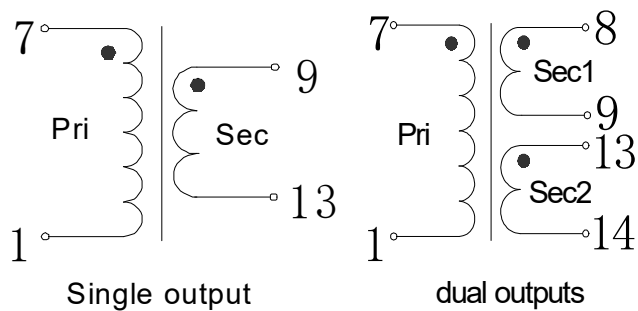

ELECTRONIC SPECIFICATIONS:

PART NO	Primary [V]	Secondary [V]	Current [mA]	Ambient TEMP.(°C)	Weight (g)	Certificate			
						VDE	UL	CQC	CE
XP541-800	115V 50/60Hz	4.5V	2888mA	T70 B	420		•		•
XP541-801	115V 50/60Hz	6V	2166mA	T70 B	420		•		•
XP541-802	115V 50/60Hz	7.5V	1733mA	T70 B	420		•		•
XP541-803	115V 50/60Hz	9V	1444mA	T70 B	420		•		•
XP541-804	115V 50/60Hz	12V	1083mA	T70 B	420		•		•
XP541-805	115V 50/60Hz	15V	866mA	T70 B	420		•		•
XP541-806	115V 50/60Hz	18V	722mA	T70 B	420		•		•
XP541-807	115V 50/60Hz	24V	541mA	T70 B	420		•		•
XP542-808	115V 50/60Hz	2x4.5V	2x1444mA	T70 B	420		•		•
XP542-809	115V 50/60Hz	2x6V	2x1083mA	T70 B	420		•		•
XP542-810	115V 50/60Hz	2x7.5V	2x866mA	T70 B	420		•		•
XP542-811	115V 50/60Hz	2x9V	2x722mA	T70 B	420		•		•
XP542-812	115V 50/60Hz	2x12V	2x541mA	T70 B	420		•		•
XP542-813	115V 50/60Hz	2x15V	2x433mA	T70 B	420		•		•
XP542-814	115V 50/60Hz	2x18V	2x361mA	T70 B	420		•		•
XP542-815	115V 50/60Hz	2x24V	2x270mA	T70 B	420		•		•
XP541-900	230V 50/60Hz	4.5V	2888mA	T70 B	420		•	•	•
XP541-901	230V 50/60Hz	6V	2166mA	T70 B	420		•	•	•
XP541-902	230V 50/60Hz	7.5V	1733mA	T70 B	420		•	•	•
XP541-903	230V 50/60Hz	9V	1444mA	T70 B	420		•	•	•
XP541-904	230V 50/60Hz	12V	1083mA	T70 B	420		•	•	•
XP541-905	230V 50/60Hz	15V	866mA	T70 B	420		•	•	•
XP541-906	230V 50/60Hz	18V	722mA	T70 B	420		•	•	•
XP541-907	230V 50/60Hz	24V	541mA	T70 B	420		•	•	•
XP542-908	230V 50/60Hz	2x4.5V	2x1444mA	T70 B	420		•	•	•
XP542-909	230V 50/60Hz	2x6V	2x1083mA	T70 B	420		•	•	•
XP542-910	230V 50/60Hz	2x7.5V	2x866mA	T70 B	420		•	•	•
XP542-911	230V 50/60Hz	2x9V	2x722mA	T70 B	420		•	•	•
XP542-912	230V 50/60Hz	2x12V	2x541mA	T70 B	420		•	•	•
XP542-913	230V 50/60Hz	2x15V	2x433mA	T70 B	420		•	•	•
XP542-914	230V 50/60Hz	2x18V	2x361mA	T70 B	420		•	•	•
XP542-915	230V 50/60Hz	2x24V	2x270mA	T70 B	420		•	•	•