


## EI60-21 25.0VA Encapsulated Transformer

### FEATURES

- CQC file No.: CQC17001167224
- CE file No: BSTXD190311209301EC/BSTXD190311209301SC
- Vacuum Filling, Encapsulated Design Prevent dust and humidity
- High efficiency, Low Temperature Rise
- Dielectric Strength 4000VAC
- Class B (130° C) insulation material.
- Operating temperature from -40° C to 70° C
- Design according to EN61558-1, EN61000,GB19212-1, GB19212-7
- 100% Production Tested


### OUTLINE DIMENSIONS

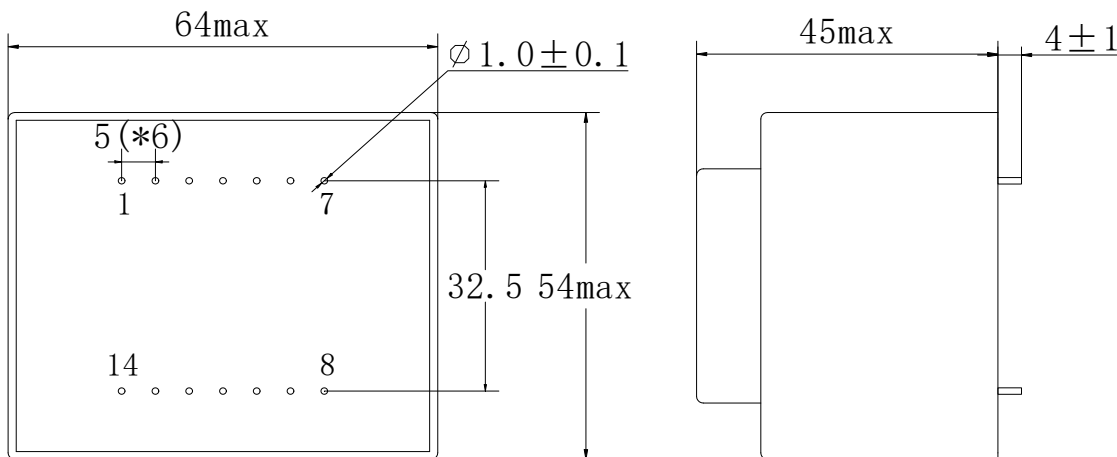

### COMMON APPLICATIONS

- Medical equipment
- Industrial equipment
- Industrial control
- Test equipment
- Industrial computer
- Avionics and Telecommunications

### SCHEMATIC DIAGRAM

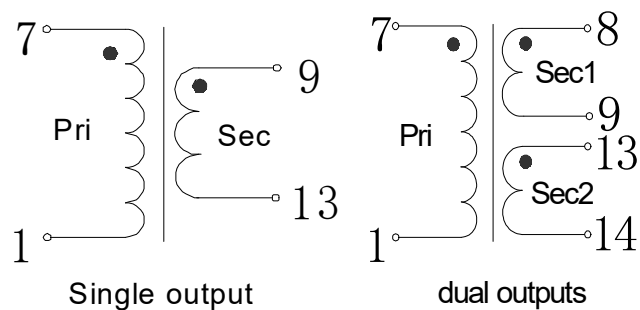

## ELECTRONIC SPECIFICATIONS:

PART NO	Primary [V]	Secondary [V]	Current [mA]	Ambient TEMP.(°C)	Weight (g)	Certificate			
						VDE	UL	CQC	CE
XP601-816	115V 50/60Hz	4.5V	5555mA	T40 B	570		•		•
XP601-817	115V 50/60Hz	6V	4166mA	T40 B	570		•		•
XP601-818	115V 50/60Hz	7.5V	3333mA	T40 B	570		•		•
XP601-819	115V 50/60Hz	9V	2777mA	T40 B	570		•		•
XP601-820	115V 50/60Hz	12V	2083mA	T40 B	570		•		•
XP601-821	115V 50/60Hz	15V	1666mA	T40 B	570		•		•
XP601-822	115V 50/60Hz	18V	1388mA	T40 B	570		•		•
XP601-823	115V 50/60Hz	24V	1041mA	T40 B	570		•		•
XP602-824	115V 50/60Hz	2x4.5V	2x2777mA	T40 B	570		•		•
XP602-825	115V 50/60Hz	2x6V	2x2083mA	T40 B	570		•		•
XP602-826	115V 50/60Hz	2x7.5V	2x1666mA	T40 B	570		•		•
XP602-827	115V 50/60Hz	2x9V	2x1388mA	T40 B	570		•		•
XP602-828	115V 50/60Hz	2x12V	2x1041mA	T40 B	570		•		•
XP602-829	115V 50/60Hz	2x15V	2x833mA	T40 B	570		•		•
XP602-830	115V 50/60Hz	2x18V	2x694mA	T40 B	570		•		•
XP602-831	115V 50/60Hz	2x24V	2x520mA	T40 B	570		•		•
XP601-916	230V 50/60Hz	4.5V	5555mA	T40 B	570		•	•	•
XP601-917	230V 50/60Hz	6V	4166mA	T40 B	570		•	•	•
XP601-918	230V 50/60Hz	7.5V	3333mA	T40 B	570		•	•	•
XP601-919	230V 50/60Hz	9V	2777mA	T40 B	570		•	•	•
XP601-920	230V 50/60Hz	12V	2083mA	T40 B	570		•	•	•
XP601-921	230V 50/60Hz	15V	1666mA	T40 B	570		•	•	•
XP601-922	230V 50/60Hz	18V	1388mA	T40 B	570		•	•	•
XP601-923	230V 50/60Hz	24V	1041mA	T40 B	570		•	•	•
XP602-924	230V 50/60Hz	2x4.5V	2x2777mA	T40 B	570		•	•	•
XP602-925	230V 50/60Hz	2x6V	2x2083mA	T40 B	570		•	•	•
XP602-926	230V 50/60Hz	2x7.5V	2x1666mA	T40 B	570		•	•	•
XP602-927	230V 50/60Hz	2x9V	2x1388mA	T40 B	570		•	•	•
XP602-928	230V 50/60Hz	2x12V	2x1041mA	T40 B	570		•	•	•
XP602-929	230V 50/60Hz	2x15V	2x833mA	T40 B	570		•	•	•
XP602-930	230V 50/60Hz	2x18V	2x694mA	T40 B	570		•	•	•
XP602-931	230V 50/60Hz	2x24V	2x520mA	T40 B	570		•	•	•